




WaveGrip

C400

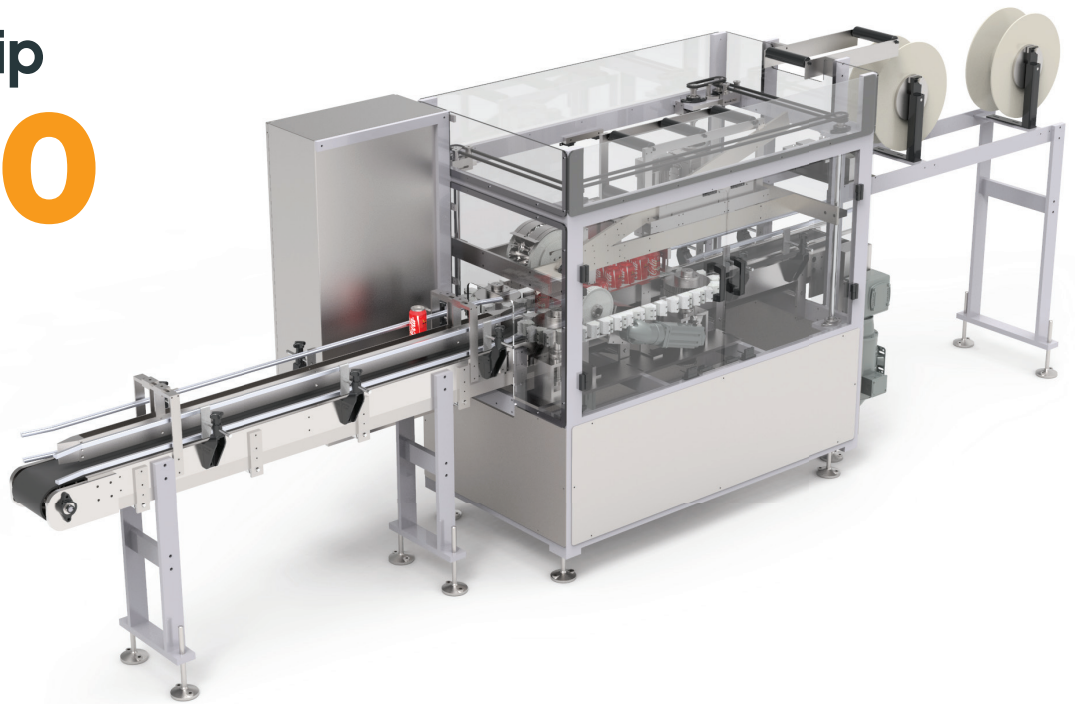

THE C400 SYSTEM IS A CONTINUOUS MOTION APPLICATOR CAPABLE OF PACKING UP TO 400 CANS PER MINUTE. WITH A MODULAR DESIGN AND A SMALL FOOTPRINT, THE C400 IS FLEXIBLE ENOUGH TO EASILY SCALE AS YOUR BUSINESS GROWS WHILE TAKING UP MINIMAL FLOOR SPACE. LIKE ALL WAVEGRIP APPLICATORS OUR C400 SYSTEM IS BUILT TO THE HIGHEST STANDARD BY MASSMAN AUTOMATION DESIGN AND IS BACKED UP BY AN EXPERIENCED ENGINEERING SUPPORT TEAM.



Package up to 400 cans per minute at an accessible price



Takes up less space than comparable applicators at less than 40 square feet



Simple 15 minute change over from standard and sleek carriers



Fewer moving parts simplify your maintenance requirements

TECHNICAL INFORMATION

| | | | |
|------------------------------|--|-----------------------------|---|
| DIMENSIONS | 206.75" L X 39" W X 70" H. +/- 4 | REEL SIZE | Standard: 500mm OD (4545 4pk / 3030 6pk / 2272 8pk) Sleek: 500mm OD (5,262 4pk / 3508 6pk / 6,631 8pk) |
| CONVEYOR HEIGHT | (+/-) 36" + - 4" (leg extensions available if required) | ELECTRICAL | 480V 3 PHASE |
| WEIGHT | 5000 lbs. approximate | AIR | N/A |
| INFEEED OPTIONS | Inline Twin Lane / 2 Cans Wide | PLC | AB COMPACT LOGIX |
| CAN SIZES | 202/211 Standard 12oz, 16oz, 19.2oz 202/202 Sleek 12oz | OPERATOR INTERFACE | DISPLAY PV 700 PLUS 7" TOUCH VER 7 STANDARD |
| MACHINE ACCESS PANELS | 4 Swinging Doors | FAULT IDENTIFICATION | YES on HMI |
| SPEED | 400 cans per minute | INTERLOCKS | ALLEN BRADLEY 44N-Z2NRSIC |
| OUTPUT PACK FORMAT | 4, 6, 8 (short side leading) | STANDARDS | UL CUL ASME |
| | | WARRANTY | 12 months |